



S-Crane Wheel Lubricator System

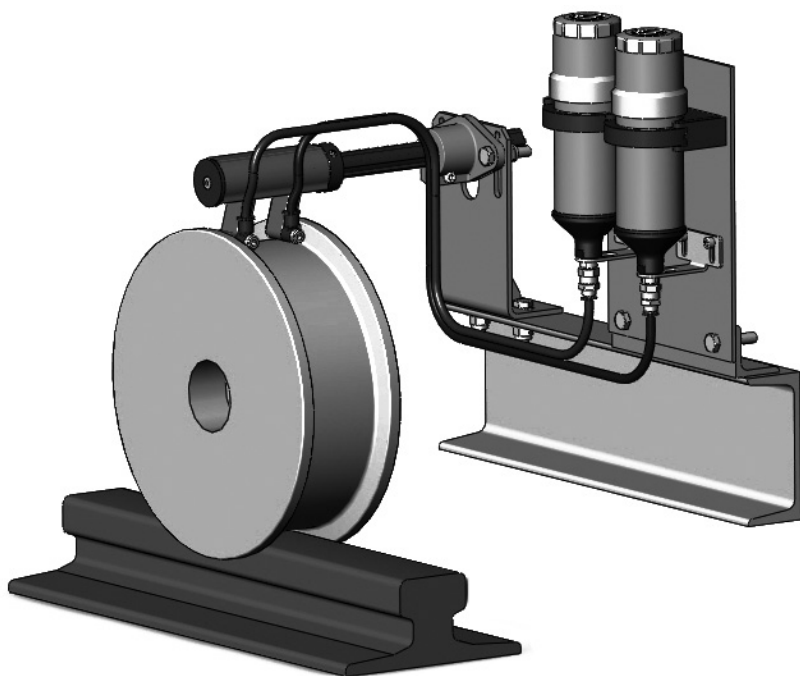

- The SCWL system can be mounted on the side or above the axle of the drive wheel on a rigid part of the crane structure
- Select the required configuration to suit your installation as shown below

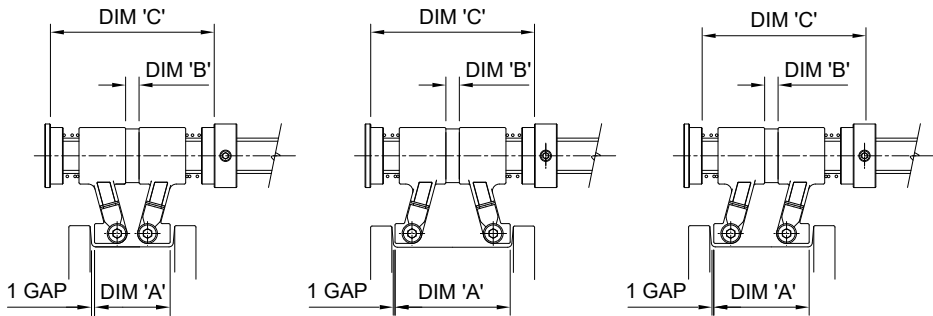

$$\begin{aligned} \text{DIMN 'B'} &= \text{DIMN 'A'} - 44 \\ \text{DIMN 'C'} &= \text{DIMN 'A'} + 62 \end{aligned}$$

$$\begin{aligned} \text{DIMN 'B'} &= \text{DIMN 'A'} - 72 \\ \text{DIMN 'C'} &= \text{DIMN 'A'} + 34 \end{aligned}$$

$$\begin{aligned} \text{DIMN 'B'} &= \text{DIMN 'A'} - 58 \\ \text{DIMN 'C'} &= \text{DIMN 'A'} + 48 \end{aligned}$$

